

Sustav COLFLEX za sanaciju dimnjaka

KATALOG ELEMENATA SUSTAVA




ISTITUTO
GIORDANO

Qualità al Plurale

Katalog elemenata sustava

*Svi artikli se isporučuju bez brtvi i brtvila koji se kupuju zasebno

Duplostijena fleksibilna cijev inox s unutarnjom glatkom stjenkom - CFDW

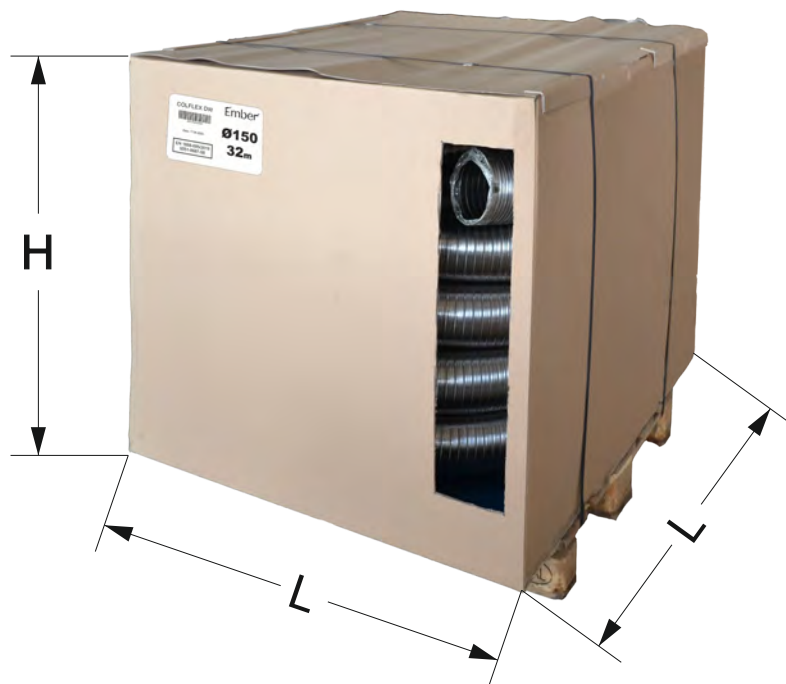


Art.No.Code	dn	Ø vanjski	Kolut (m)	L (cm)	H (cm)	kg/m
CEN01-120	120	126	30	120	100	0,96
CEN01-150	150	156	30	120	100	1,22
CEN01-180	180	186	20	120	100	1,44
CEN01-200	200	206	20	120	100	1,60

Navojni spojni adapteri

Flexibilni duplostjeni - CFDW / kruti jednostjeni - CSW (F)


↑
smjer
dima

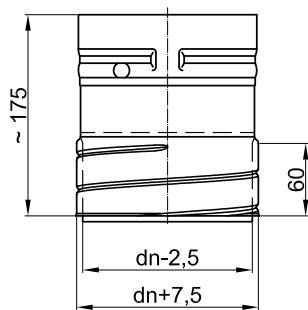

Art.No.Code	dn
CEN08-120	120
CEN08-150	150
CEN08-180	180
CEN08-200	200

Kruti jednostjeni - CSW (M) / Flexibilni duplostjeni - CFDW


↑
smjer
dima

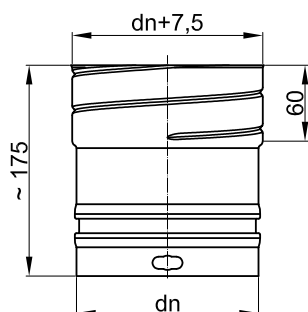

Art.No.Code	dn
CEN07-120	120
CEN07-150	150
CEN07-180	180
CEN07-200	200


Flexibilni duplostjeni - CFDW / Flexibilni duplostjeni - CFDW

↑
smjer
dima

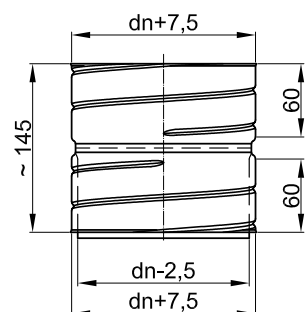

Art.No.Code	dn
CEN06-120	120
CEN06-150	150
CEN06-180	180
CEN06-200	200


Provlakač montažni - CFDW

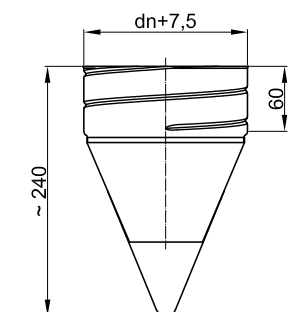

Art.No.Code	dn
CEN20-120	120
CEN20-150	150
CEN20-180	180
CEN20-200	200


Kruti priključni elementi

Kondenzacijski element s bočnim ispustom - CSW

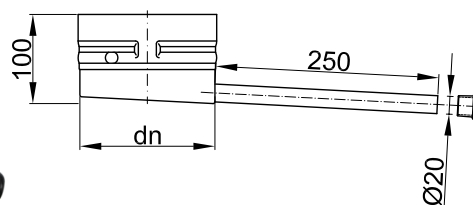


Art.No.Code	dn
CEN12-120	120
CEN12-150	150
CEN12-180	180
CEN12-200	200

Kondenzacijski element s donjim ispustom - CSW

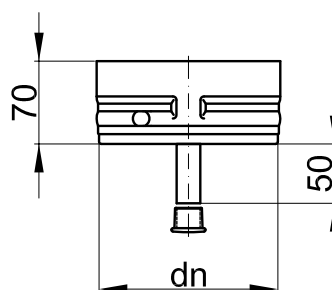


Art.No.Code	dn
CEN13-120	120
CEN13-150	150
CEN13-180	180
CEN13-200	200

Držać za fiksiranje podesivi - CSW

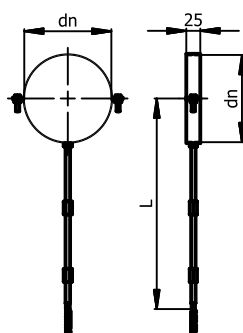

Art.No.Code	dn	L (min-max)
CEN16-120	120	80-130mm
CEN16-150	150	95-325mm
CEN16-180	180	110-340mm
CEN16-200	200	120-350mm


Element s okruglim kontrolnim otvorom i poklopcem (T600 - N1) - CSW

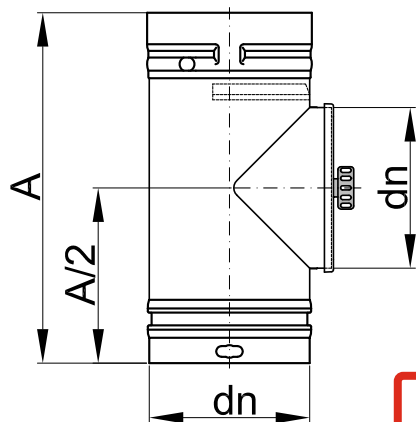

Art.No.Code	dn	A
CEN11-120	120	330
CEN11-150	150	330
CEN11-180	180	370
CEN11-200	200	400

Pažnja!
Za temperature do 600°C u potlačnom režimu rada (N1)


Element s okruglim kontrolnim otvorom i poklopcem (T250 - P1) - CSW

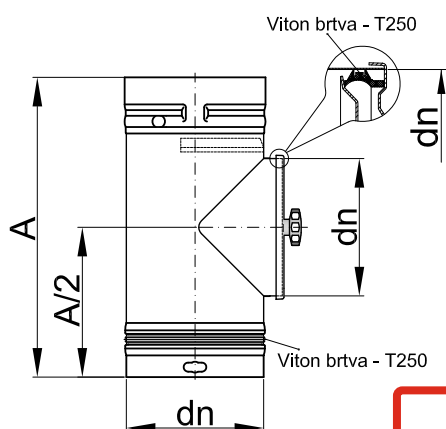

Art.No.Code	dn	A
CEN21-120	120	330
CEN21-150	150	330
CEN21-180	180	370
CEN21-200	200	400


Pažnja!
Za temperature do 250°C u pretlačnom režimu rada (P1)

Element s izvodom za vrata (T600 - N1) - CSW

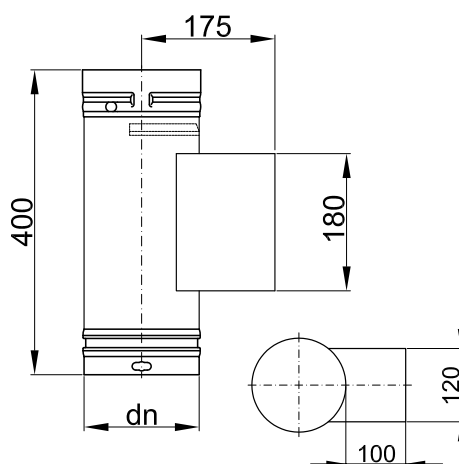


Art.No.Code	dn
CEN10-120	120
CEN10-150	150
CEN10-180	180
CEN10-200	200

T-komad - Fiksni - CSW

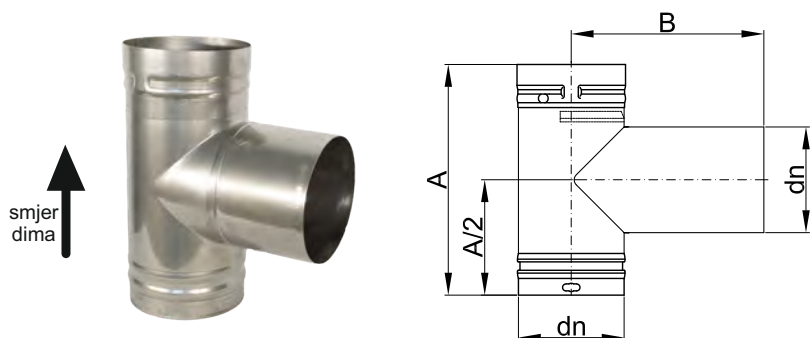

Art.No.Code	dn	A	B
CEN14-120	120	330	260
CEN14-150	150	330	275
CEN14-180	180	370	290
CEN14-200	200	400	300

T-komad - Proturani - CSW

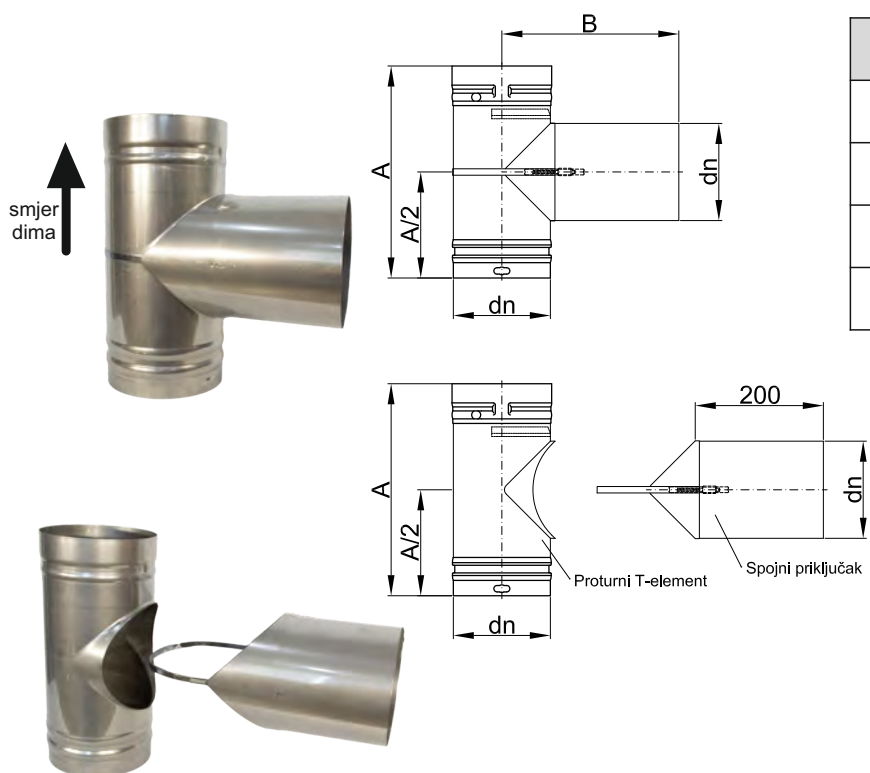


Art.No.Code	dn	A	B
CEN15-120	120	330	260
CEN15-150	150	330	275
CEN15-180	180	370	290
CEN15-200	200	400	300

PAŽNJA!


Spoj priključka i proturnog T-elementa je nakon montaže priključka potrebno zabrtviti termootpornim silikonskim brtvilom sa unutarnje strane na mjestu spajanja.

Cijevna zaštita dupla

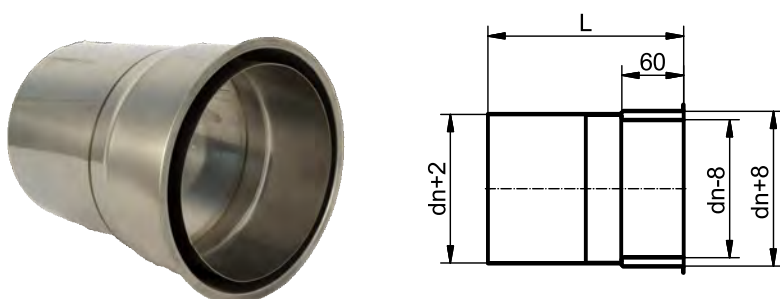

Art.No.Code	dn	L
CEX26-120	120	200
CEX26-150	150	200
CEX26-180	180	200
CEX26-200	200	200


Poklopac revizijskog otvora (T600 - N1) - CSW

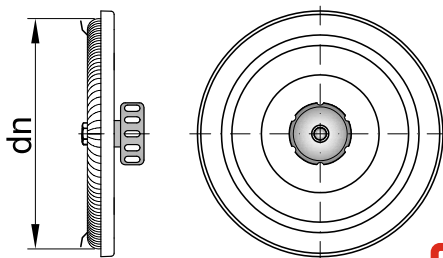

Art.No.Code	dn
CEN19120	120
CEN19-150	150
CEN19-180	180
CEN19-200	200

Pažnja!
Za temperature do 600°C u potlačnom režimu rada (N1)


Poklopac revizijskog otvora (T250 - P1) - CSW

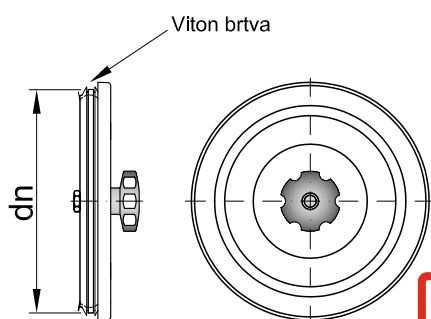

Art.No.Code	dn
CEN18-120	120
CEN18-150	150
CEN18-180	180
CEN18t-200	200


Pažnja!
Za temperature do 250°C u pretlačnom režimu rada (P1)

Vrata dimnjaka - INOX

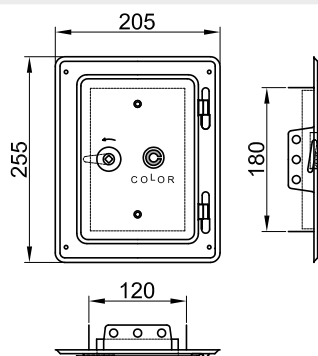



Art.No.Code	dn
CEX07-002	120-200

Inox vrata s nastavkom - T600-N1 - CSW

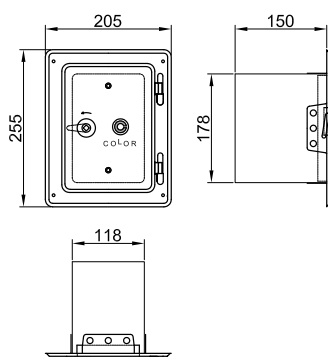


Art.No.Code	dn
CEN09-001	120-200

Završni opšav dimnjaka - CSW

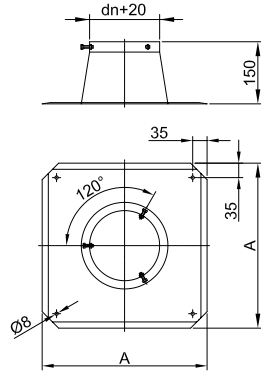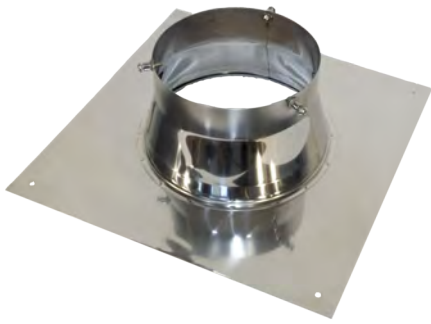


Art.No.Code	dn	A
CEN02-120	120	400
CEN02-150	150	400
CEN02-180	180	450
CEN02-200	200	470

Okapnica - CSW

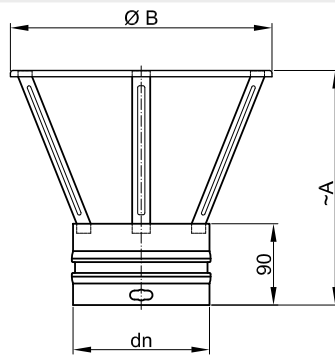


Art.No.Code	dn	A	B
CEN04-120	120	225	290
CEN04-150	150	255	290
CEN04-180	180	285	380
CEN04-200	200	295	380

Protukišna završna rozeta - CSW

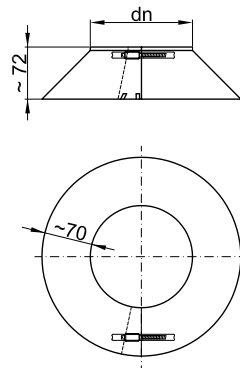

Art.No.Code	dn
CEN03-120	120
CEN03-150	150
CEN03-180	180
CEN03-200	200

Odstojni element za centriranje flex. cijevi - CFDW

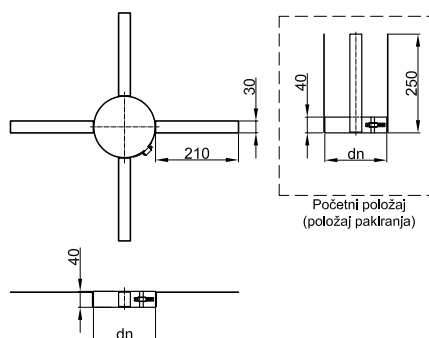

Art.No.Code	dn
CEN05-120	120
CEN05-150	150
CEN05-180	180
CEN05-200	200

Brtve i brtvila

Brtvilo silikonsko T250



Art.No.Code	Pakiranje
CEN17-001	310ml



Za temperature
do 250°C

Brтва - VITON - Tmax. 250 °C



Art.No.Code	dn	Primjena za: Sistem dn XXX
CEK12-101	100	CSW dn120 i CFDW dn120
CEK12-125	125	CSW dn150 i CFDW dn150
CEK12-150	150	CSW dn180, dn200 i CFDW dn180, dn200

